

# Smooth-N-Groove®

Smooth print surface  
for walls with grooves.

**NEW**  
Product!

- White foil media with permanent adhesive (9 mil thick).
- Conforms to rough surfaces.
- No heat guns required.
- Easy to install (peel & stick).
- No overlamine required

## Application Ideas:

- Sporting Events
- Now Hiring Sign
- Wayfinding
- Retail Entrances
- Cultural Events
- Restaurants
- Office Hours on Exterior Wall

## Smooth-N-Groove® Surfaces

Brick	Concrete	Stone	Corrugated Metal
✓	✓	✓	✓



Printable with UV inkjet,  
latex, solvent, eco-solvent.



**No laminate  
required**




## Exclusive Multi-Layer Construction

Printable Layer

Conformable Layer

Super Aggressive PSA

Easy peel liner

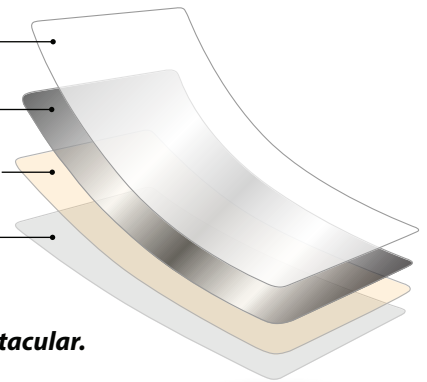

*Print. Peel. Stick. Spectacular.*



**Order Now.**

Scan the QR code and order online or call 1-888-711-7735.

**J JESSUP®**  
Adhesive Coated Films

[jessupmfg.com](http://jessupmfg.com)

# Smooth-N-Groove®

## Sizes:

- SNG-47x300 (47"x300')
- SNG-47x100 (47"x100')
- SNG-47x50 (47"x50')

## Duration:

- Outdoor use: 1+ year



PHYSICAL PROPERTIES	TEST METHODS	AVERAGE RESULTS
Thickness	PSTC - 133 - Substrate - Pressure Sensitive adhesive - Release Liner	0.0065 inch (0.165 mm) 0.0025 inch (0.064 mm) 0.006 inch (0.152 mm)
Peel Adhesion to:	PSTC - 101	
- Stainless Steel	15 minute dwell 24 hour dwell	80 oz/in (88 N/100 mm) 100 oz/in (110 N/100 mm)
- Powder coated surfaces *	15 minute dwell 24 hour dwell	70 oz/in (77 N/100 mm) 80 oz/in (88 N/100 mm)
- Polyethylene	15 minute dwell 24 hour dwell	50 oz/in (55 N/100 mm) 60 oz/in (66 N/100 mm)
Shear Adhesion to:	PSTC - 107	
- Stainless Steel	1/2" x 1/2" x 1000g	5 hours
Tack	PSTC - 6 Rolling Ball Tack	< 5 inches



**Order Now.**

Scan the QR code and order online or call 1-888-711-7735.

**J JESSUP®**  
Adhesive Coated Films

Jessup Manufacturing Company  
©2021 Jessup • MKT-JMC-SNG10222021

[jessupmfg.com](http://jessupmfg.com)